

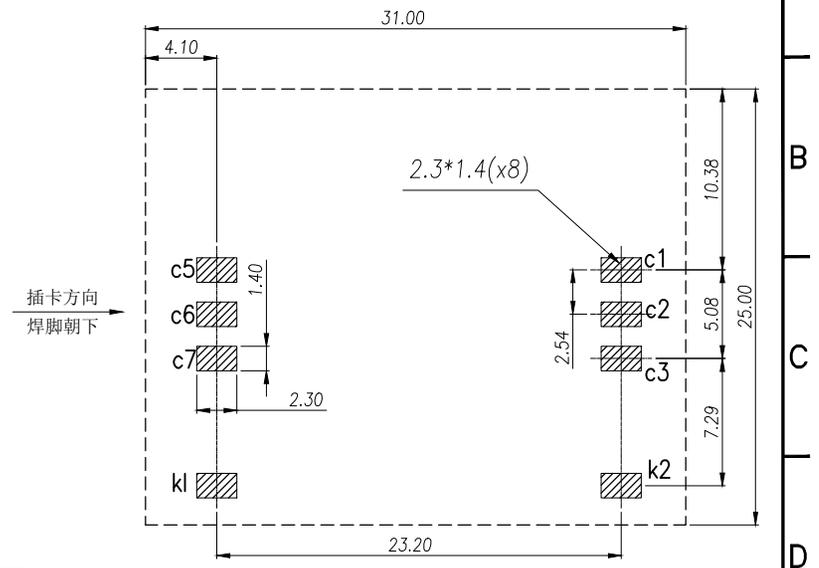


REV.	Q'TY	ECN. NO.	APR.	DATE
A		FIRST RELEASE	Yann	2023.05.11

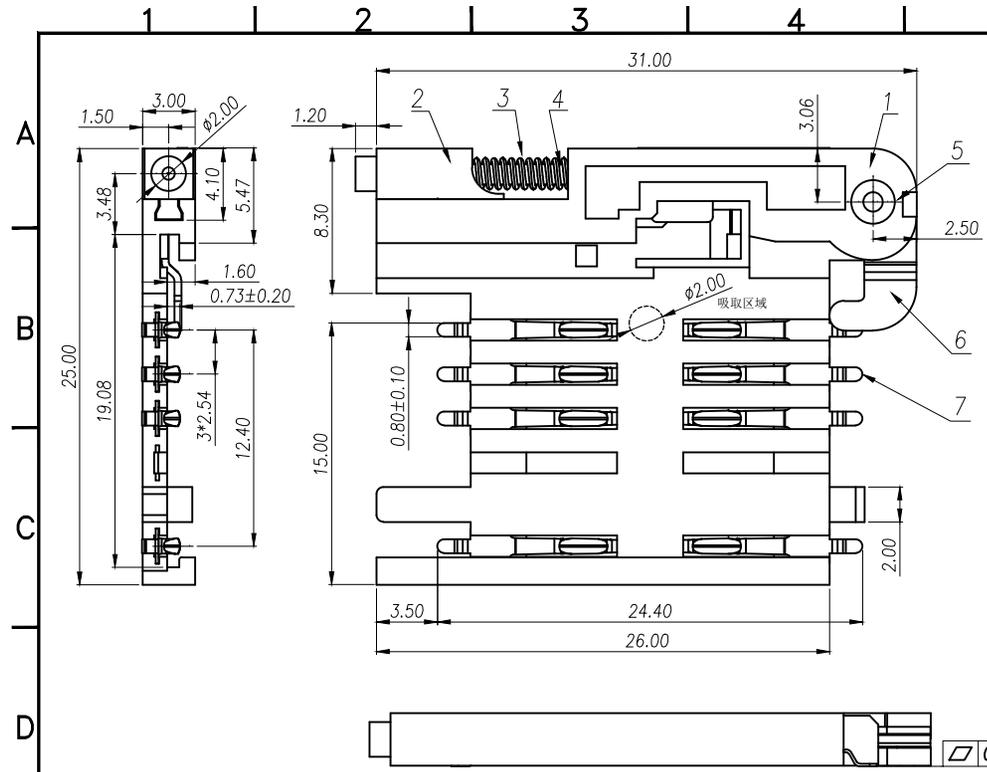

RECOMMENDED PCB LAYOUT TOP VIEW (TOLERANCE:±0.05)

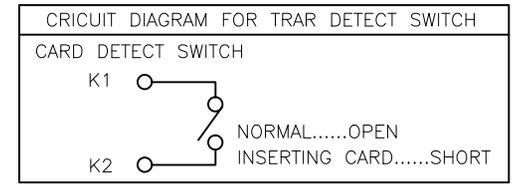

Notes:
1.Material:
Housing:
High Temperature Thermoplastic.
Terminal:Copper Alloy
2.Plating:
Terminal:50u" Ni Underplated Overall
G/F Plated On Contact Area
Tin Plated On Solder Area
3.Technical Speciality:
Rated Voltage: 30V
Current Rating: 0.5A
Insulation Resistance:1000MΩ Min.
Contact Resistance:100mΩ Max.
Withstanding Voltage: 500V DC For 1 Minutes.
Operating Temperature: -20℃~+85℃ Humidity 80% R.H Max.

序号	名称	材料	数量
7	端子	磷铜	8
6	Z形片	不锈钢	1
5	小轴	磷铜	1
4	推杆	不锈钢	1
3	弹簧	不锈钢	1
2	按钮	LCP黄色	1
1	塑胶主体	LCP黑色	1

PIIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved
K1	Detect Switch
K2	Detect Switch

Dongguan JianXing Electronics Co.,Ltd.

TITLE: 3.0H 6Pin SIM CARD CONNECTOR

DWG NO. SM021-1B300A060



PROJ. CUSTOMER DRAWING

APR. CHK. DRA. Yann


SIZE A4 SCALE 3:1 SHEET 1/2 REV. A

ROHS

REV.	Q'TY	ECN. NO.	APR.	DATE
A		FIRST RELEASE	Jason	2023.05.11

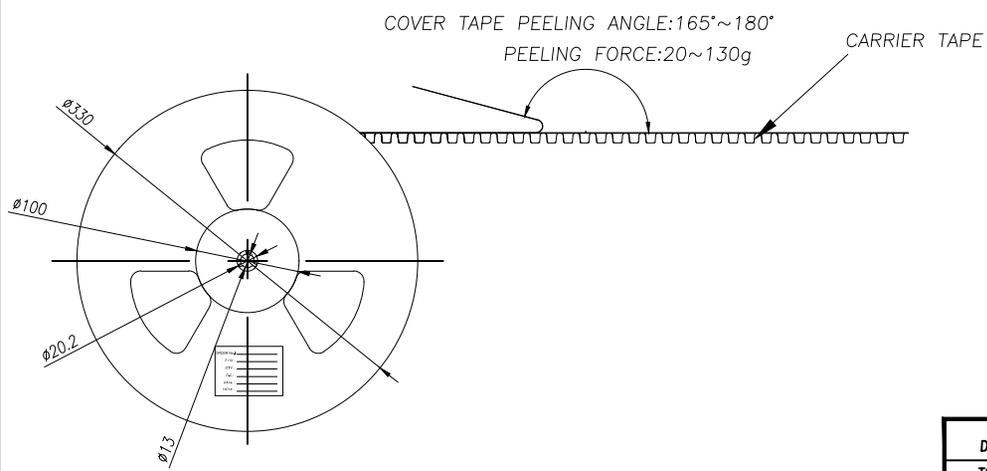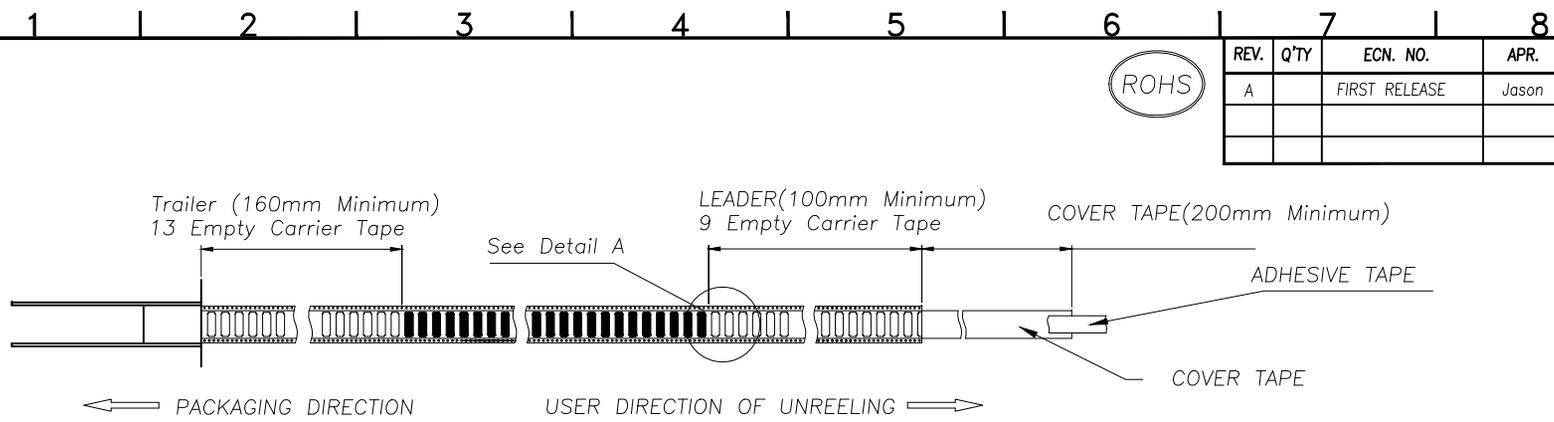

COVER TAPE PEELING ANGLE: 165°~180°
PEELING FORCE: 20~130g

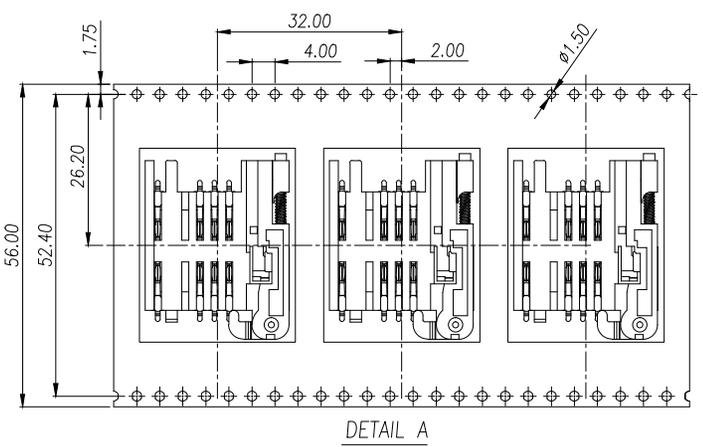

1	SM021-1B300A060	500	4	2000	350X350X340
ITEM	PRODUCT NO	QTY/REEL	REEL/CARTON	QTY/CARTON	CARTON SIZE

DIMENSION IN mm			Dongguan JianXing Electronics Co., Ltd.	
TOLERANCE UNLESS OTHERWISE SPECIFIED				
.X±0.35	X'±5'	APR.	TITLE: 3.0H 6Pin SIM CARD CONNECTOR	
.XX±0.25	.X'±3'	CHK.	DWG NO. SM021-1B300A060	
.XXX±0.15	.XX'±1'	DRA. Yann	PROJ.	CUSTOMER DRAWING
			SIZE A4	SCALE 1:3
			SHEET 2/2	REV. A